



ICOLD Symposium on Sustainable Development of Dams and River Basins, 24th - 27th February, 2021, New Delhi

FUTURE CHALLENGES IN DESIGN OF SPILLWAYS AND ENERGY DISSIPATORS

R.R.BHATE

Scientist 'B', Central Water and Power Research Station, Pune, India

DR. M. R. BHAJANTRI

Scientist 'E', Central Water and Power Research Station, Pune, India

DR. (MRS.) V. V. BHOSEKAR

Director, Central Water and Power Research Station, Pune, India

ABSTRACT

Spillways are of paramount importance and integral part in any dam project which convey the flood safely to the downstream river. There are about 57000 large dams constructed all across the world. There are currently about 5260 completed large dams in India. These dams are invariably equipped with some or other kind of spillways. As this dam building activity is going on for many years, all easy sites have already been tapped and we are left with sites where designers have to face challenges from the nature. Future spillway design will face issues like narrow valleys with high magnitude of flood leading to provision of multi-tier spillway, spillways to tackle with high rate of sedimentation, upward revision in floods due to rapid changes in environmental conditions and Glacier melting due to global warming causing increased rate of GLOF etc. To utilize the fresh water from the rivers joining the sea, multipurpose dams across the sea in the vicinity of gulf can be considered. Special design considerations are to be employed for spillway and energy dissipation arrangement as their operational performance is influenced by the cyclic tidal variations and storm surges. Stringent reservoir regulations are necessary to avoid mixing of fresh water and saline water. An attempt has been made to discuss the relevant hydraulic aspects for such complicated hydraulic structures and role of hydraulic model studies to understand the complex hydraulics and optimize the design of spillway and energy dissipators.

1. INTRODUCTION

After independence, India has invested huge amount in creating big infrastructures to store the surface runoff in the reservoirs for irrigation, drinking water supply and hydropower in the form of large, medium and small dams. The dam building activities over the years have been concentrated in the ideal and easy sites. This leaves the geologically and topographically complex and difficult sites for future activities. These sites have been identified mainly in the Himalayan and North Eastern regions. High mountains, deep narrow valleys, complex geological strata with occasional problems of stability of hill slopes and generally high levels of seismicity characterize the Himalayan terrain. These rivers have very steep bed gradient in the range of 1 in 30 to 1 in 100. These give rise to flash floods and huge amounts of sediment load. This sediment would ultimately settle in the reservoir resulting in the reduction of live storage capacity. In order to utilize the high heads and discharge available in this region for power generation this sediment should be flushed regularly. The overflow spillways using conventional methods i.e. high head storage dams for river valley projects in Himalayan regions are not suitable. The spillways considered in such topography require to perform dual role i.e. passing the flood as well as flushing the sediments. Many spillways are also designed considering the flash floods caused by Glacial Lake Outburst Flood (GLOF). Due to potential impacts of climate change on glacier dynamics, catastrophic GLOF may increase future flood risks for infrastructure and population. This is particularly relevant in view of the current development of hydropower projects in Himalaya. These flash floods also contribute to the major part of the sediment in glacierized catchments. In such complex hydrological scenario, assessing the hydraulic performance of spillways with sediment flushing facility would be of vital importance.

In terms of large dams, India now ranked third in the world after USA and China (ICOLD, 2011). There are currently about 5260 completed large dams in India and 437 under construction (CWC, 2018). Many of these dams are decades old and for these dams spillways were designed for original design floods based on empirical formulae with applied discretions by experienced designers. Checking and upgrading the dam design flood estimates incorporating the

available extended data sets and latest flood estimation methods has been given technical priority in national dam safety programme (Pandya et.al., 2014). Based on outcomes of the substantial sets of design reviews under DRIP, it is found that in more than 50% cases the original flood needs upward revision of 50% to 100%. As per data collected by ICOLD on failure of large dams, nearly 35% of dams have failed globally due to causes related to inadequate spillway capacity and hence this becomes a major concern in Dam safety programme. This necessitates the need of redesigning the spillways and energy dissipators cater for this revised flood as a structural measure.

India has got about 7515 km of coast line and majority of surface runoff is directly delivering in to the sea. This highlights the fact that there is enough water available but deficiency is in storage. Hence, the solution lies in utilizing (or) conserving the abundant monsoon water which runs off into the sea (Yang, 2015). Coastal reservoir is a paradigm shift in water resources development from storing water in inland dams to storing freshwater by the coast. This converts flood water into valuable water resources. Coastal reservoir is a reservoir in the sea to store a portion of the river flood waters which joins the ocean in the monsoon period and use it during the drought periods. It is a unique hydraulic structure constructed at an estuary, gulf, or bay or in the sea (at the point where a river meets a sea) to store the portion of excess water at flood times. This seawall or dike structure may run for several kilometers joining the curved coastline in the form of chord length. The requirement of design of spillways and energy dissipators for coastal reservoirs are unique. Tidal levels and storm surge on the downstream (sea side) play important role in design and operation of spillway.

2. DESIGN PHILOSOPHY OF SPILLWAYS IN HIMALAYAN REGION

The major causes that are responsible for sediment laden floods and flash-floods in Himalayan Rivers are:

1. Cloudburst in the catchment of the river
2. Heavy rainfall in the upper reaches of the river
3. Sudden breach or bursts of glacial lakes
4. Landslides leading to obstruction of flow and change in the river course
5. Tectonic movement leading to slope failure and landslides

These rivers carry heavy sediment load during monsoon and snow melt in summer, which has to be efficiently managed to ensure long term sustainability of hydropower projects. Conventional design viz. high ogee spillways in storage dams are not suitable to deal with floods carrying heavy sediment. Considering the experience of silting of dams and damages to power plants, the trend has been changed to designing run-of-the-river schemes which utilizes the stream flow as it comes without any large storage. Elaborate desilting arrangements are also envisaged before the silt laden water enters the power plant. Innovative designs of spillways have been evolved based on the concept of flushing. Recent trends in designing the spillways is by modifying the low level sluices with due consideration for flushing (Deolalikar et.al., 2008). Orifice spillways (Breastwall / sluice spillway) are thus evolved over last few years to cater for both flood disposal and flushing of sediments. The main parameters affecting the performance of orifice spillway are; head over the opening, size of the sluice barrel and entrance shape of the sluice bellmouth. The hydraulics of orifice spillway changes with the varying reservoir levels. The flow is free flow for reservoir water levels below the top of the roof of the sluice. For higher water levels the flow is orifice flow. The crest profile is required to be designed for orifice (pressurized) flow. Figure 1 shows the definition sketch of orifice spillway.

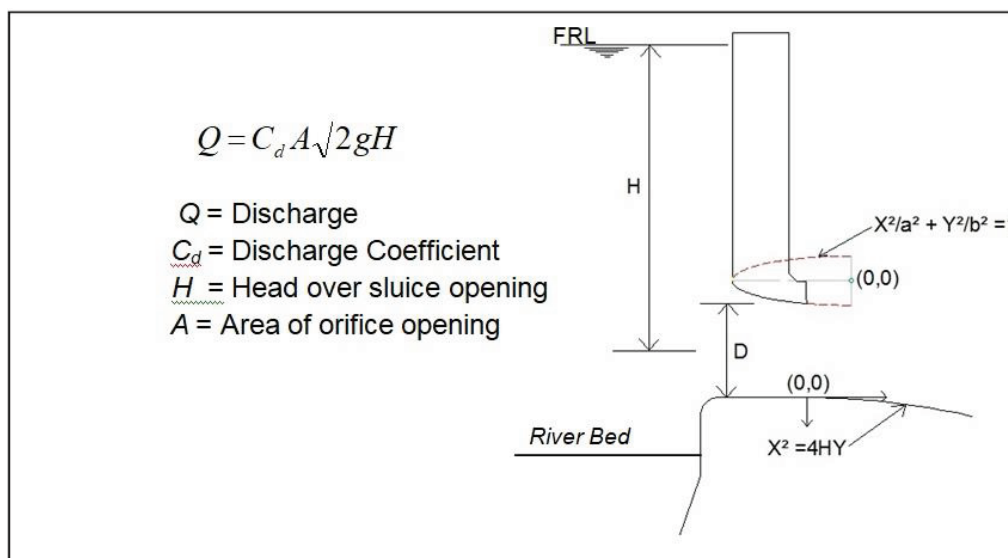


Figure 1 : Definition sketch of Orifice spillway

It has been experienced from the physical model studies that the flow through sluice barrel do not get fully developed and that flow separation takes place on the sluice roof profile resulting in negative pressure for high head spillways. Such high head sluice spillways should be checked against presence of sub-atmospheric pressures on the bell-mouth roof to avoid cavitation damage. The roof profile has not been standardized with respect to the upstream head because of many hydraulic and structural parameters such as thickness of breast wall and piers, bottom profile of spillway, width of the opening and sediment flushing requirements etc. There is a need for evolving hydraulically efficient roof profile of for high head orifice spillways.

Orifice spillways necessitate some special design considerations. Breast walls have to bear the upstream water head with beams or slabs spanning between and fixed with two piers. As such, the breast wall and both the piers have to be constructed as a single structural unit. The construction joint is, therefore, provided at the center of each pier, except the end piers. Thus, a single pier is virtually a combination of two full piers separated by a construction joint and a typical spillway monolith is composed of two piers and breast wall. In a standard overflow spillway without breast wall, construction joints are provided at the center of the monolith. Special care is also required regarding the top seal of the radial gate in ensuring water tightness. The larger velocities associated with the high heads may increase the potential for cavitation and erosion damage to the structure. Adequate protection measures should be taken during the construction of the sluice barrel and breastwall spillway, to withstand the erosive power of the silt laden water while flushing the reservoir and flood routing, by way of special type of concreting (epoxy bonded epoxy mortar, polymer concrete, or epoxy-bonded replacement concrete) or providing steel lining along the discharge channel of the spillway.

Based on site-specific constraints of geological and topographical considerations, innovative spillways are evolved. For example, rock fill or concrete faced rock fill dams are designed due to weak geology for the diversion dam. In such cases the spillway is provided along the banks of the reservoir. Long chutes instead of short spillway are provided for discharging the flow in the river downstream as in the case of Kishanganga and Dhauliganga H. E. projects. Tunnel spillways are often provided when the river gorge is narrow and the discharge to be passed is not large enough for designing a two tier spillway. Tunnel spillway can also be provided for diverting silt laden flows, e.g. Parbati-III project. Many a times diversion tunnels used during construction stage of the dam are converted in to spillway tunnels, e.g. Dhauliganga project, Tehri project.

2.1 Two tier spillways

In the upper reaches of mighty rivers like Brahmaputra, the river gorges are narrow and the discharges to be passed through spillway are high. Therefore, designing an orifice spillway becomes difficult. Multi-tier spillways have evolved to overcome this difficulty. Two/ three orifice spillways and an overflow spillway on the top can form a multi-tier spillway as shown in Fig. 3. The bottom orifice spillway is designed to take care of normal flood as well flushing of sediment and the upper spillways will cater excess flood to be passed through reservoir. The energy dissipator for these spillways may be common or independent.

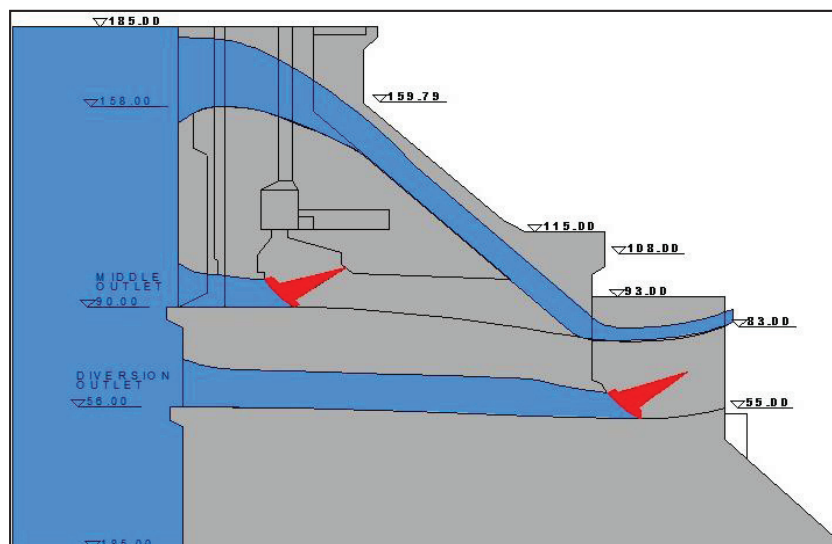


Figure 2 : Cross section of typical multi-level spillway

One such spillway has been designed for PMF of 60,315 m³/s and studied at CWPRS for Lower Siang Dam spillway in Arunachal Pradesh. A common energy dissipator in the form of stilling basin has been provided for both the orifice and overflow spillway. The design has been evolved on a sectional model to solve the complex flow problems at the junction of the spillways. Figure 3 shows view of the sectional model in operation.



Figure 3 : View of the sectional model of two tier spillway

Sometimes, based on techno-economic feasibility considerations, power intake and power house structure and tailrace channel has to be provided in the body of dam, if fragile geology of Himalaya does not permit independent layout for power intake, water conductor system and huge underground power house cavern. This type of two-tier spillway and dam foot power house has been considered for Siang Lower run-of-the river H. E. Project in Arunachal Pradesh. The project envisages construction of 86 m high concrete gravity dam across river Siang to generate power of 2700 MW utilizing a net head of 55 m. The spillway arrangement and construction schedule envisaged is unique. A two tier spillway comprising of overflow ogee spillway on the top tier and sluice spillway below is proposed. Sluice spillway performs dual function of disposing flood as well as flushing of sediment out of reservoir of diversion dam of run of the river scheme. The design of these structures cannot be standardized and depend on site specific conditions. Extensive physical model studies were conducted on 1:55 scale 2-D sectional model and 1:100 scale 3-D comprehensive model for finalizing/ optimizing the design. These studies played an important role in enhancing the overall performance of spillway and energy dissipator by incorporating various modifications to orifice roof & bottom profile, overflow spillway profile, length and elevation of the stilling basin, finalizing the height of cofferdam required during construction phases etc.

2.2 Special considerations for energy dissipators

The factors that govern the choice of the type of energy dissipator are hydraulic considerations, topography, geology, type of dam, layout and other associated structures, economic comparisons, frequency of usage etc. In Himalayan regions the topography is normally steep, fragile geology, high intensity of rain, high level of seismicity etc. cause high load of sediments. Since the spillway has to surplus both the flood and sediment, special considerations are required for design of suitable energy dissipators. Ski-jump bucket is found to be the most suitable form of energy dissipator because of its obvious advantage during flushing operation. The sediment passes down the spillway with supercritical flow without deposition and churning in the bucket. Fortunately, steep bed slopes of the rivers result in low tail water depth permitting two choice of energy dissipator. The water and scour profiles for entire range of discharges and reservoir water levels observed on the model provide a comprehensive picture of ski jump jet and scour profiles. These studies play important role in deciding the location and size of plunge pool. In many projects like Nathpa Jhakri, Tala, Chamera- I, Dhauliganga and Ranganadi, ski-jump bucket has been provided as energy dissipator. If, however, geological conditions are not favourable, a hydraulic jump stilling basin may have to be adopted. The high unit discharge passing down a low head, results in a low Froude number conditions. The stilling basins for the Froude number in the range of 2.5 – 4.5 are rather difficult to design to ensure satisfactory performance for the entire range of discharge. Because of the requirement of passing silt-laden flows, use of energy dissipating appurtenances like chute and baffle blocks is not advisable. The resulting basin is excessively long and often deep-seated below the general river bed, making it vulnerable to deposition by silt during flushing operation. Experience with stilling basin of Chamera- II project shows that a trade-off is desirable between the hydraulic efficiency of energy dissipation and the self-cleansing potential of the stilling basin during flushing operation. Cylindrical end-sills are generally preferred for easy movement of sediment out of the basin. Provision of roller bucket is generally avoided as an energy dissipator due to likelihood of abrasion damage of the bucket due to churning of sediment.

In some cases, head-discharge tail water combinations for the full operating range of a structure do not result in a design, which is exclusively a flip bucket or hydraulic jump stilling basin. In such a situation, a combination type of energy dissipator with a horizontal apron terminating with a low circular upturned end sill is found to be quite satisfactory. A concrete apron downstream of the end sill is required to protect the spillway against undermining due to scour during transition action from hydraulic jump to flip action and vice versa, as shown in Figure 4. Another alternative would be to isolate a few spans of the spillway on the flanks, with apron at higher level for flushing out sediment, as shown in Figure 5 (Khatsuria, 2004). These spans would function with hydraulic jump under sweep out condition, for small discharges of the order of average annual flow, during flushing operation. The central spans would cater to the normal discharges. Such arrangement has been provided for Chukha dam spillway, Bhutan.

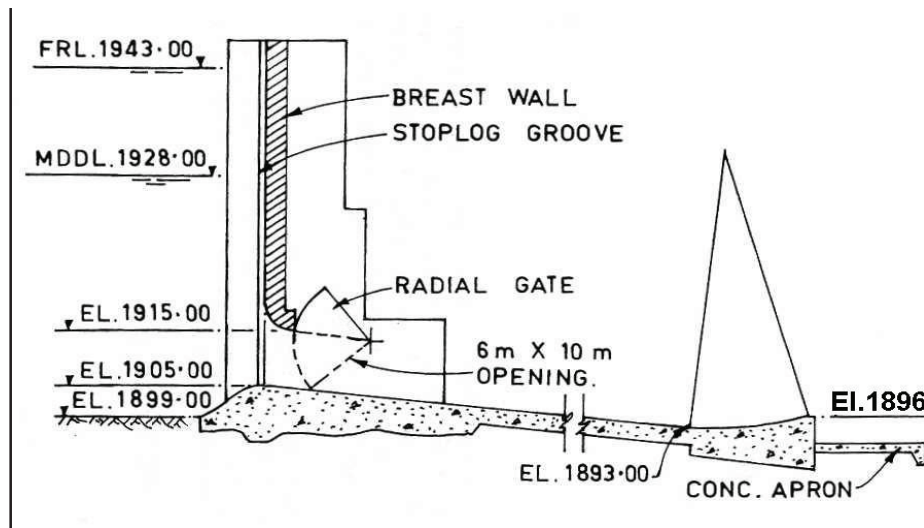


Figure 4 : Spillway cross section of Chukha dam spillway (Khatsuria, 2004)

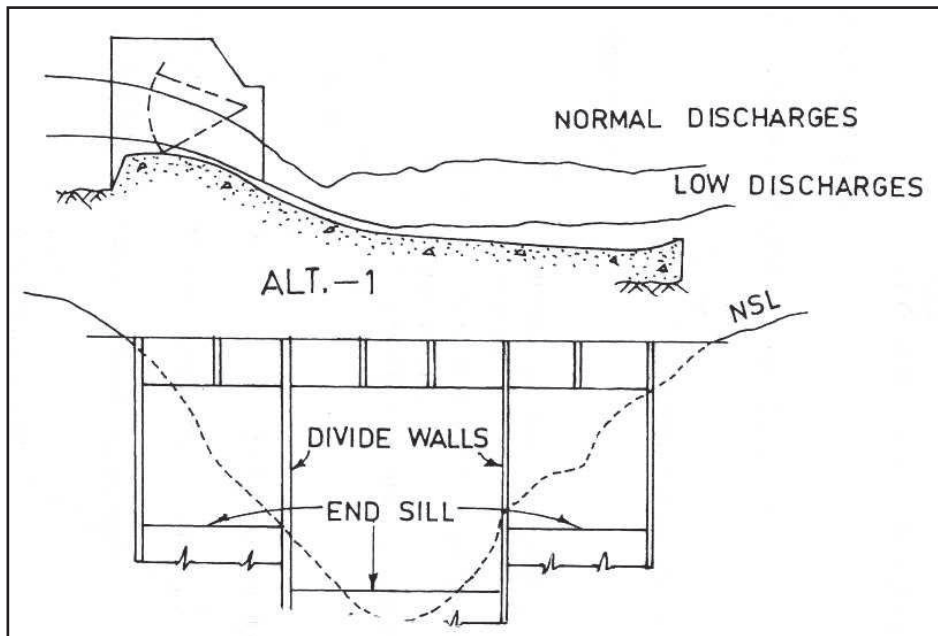


Figure 5 : Provision of spans at different levels (Khatsuria, 2004)

3. SPILLWAY DESIGN FLOOD DUE TO CLIMATE CHANGE

3.1 Impact of Himalayan Glaciers and GLOF on design of spillways

The Himalayas have the largest concentration of glaciers outside the polar region. These glaciers are a freshwater reserve for nine major river systems in Asia – a lifeline for almost one-third of humanity. The climatic change/variability in recent decades has made considerable impacts on the glacier life cycle in the Himalayan region. As a result, many big glaciers melted, forming a large number of glacial lakes e.g. Parechu Lake (Tibet), Dig Tsho Lake (Nepal) and Charobari Lake (Uttarakhand). Due to an increase in the rate at which ice and snow melted, the accumulation of water in these lakes started increasing. Sudden discharge of large volumes of water with debris from these lakes potentially causes glacial lake outburst floods (GLOFs) in valleys downstream. These in turn give rise to an increase in the potential threat of glacial lake outburst floods occurring. A number of hydroelectric projects in India, Bhutan and Nepal are being planned in the Himalayan regions. It has become necessary for the project planners and designers to account for the GLOF also along with the Probable Maximum Flood (PMF) due to rainfall for deciding the spillway capacity of projects. Table 1 shows the magnitude of GLOF considered for various hydropower projects in Himalaya in addition to Probable Maximum Flood (PMF) for which hydraulic model studies for spillways were carried out or being referred for studies at CWPRS, Pune.

Table 1 : Magnitude of GLOF and PMF for various projects in Himalayan region

Sl. No.	Name of the Project	PMF in m ³ /s	GLOF in m ³ /s	PMF + GLOF m ³ /s	Percentage of GLOF wrt PMF
1	Punatsangchhu-I H.E. Project, Bhutan	11,500	4,300	15,800	37.4
2	Punatsangchhu-II H.E. Pro-ject, Bhutan	11,723	4,300	16,023	36.7
3	Etalin H.E. Project, Dri Limb, Ar. Pradesh	11,811	1,170	12,981	9.9
4	Etalin H.E. Project, Tangon Limb, Ar.Pradesh	10,218	2,143	12,361	20.97
5	Arun-III H.E. Project, Nepal	8,880	6,830	15,710	76.91
6	Chamakharchhu H.E. Project, Bhutan	9,406	5,112	14,518	54.35
7	Kwar H.E. Project, J & K	10534	620	11,154	5.88
8	Mangdechhu H.E. Project, Bhutan	6,900	3,715	10,615	53.84

Approximately 15,000 glaciers (covering an area of 33,340 sq.km), and 9000 glacial lakes throughout Bhutan, Nepal and Pakistan, as well as selected river basins in China and India were documented in a baseline study conducted earlier by ICIMOD, UNEP, and the Asia Pacific Network for Global Change Research (APN). GLOF events have adversely affected Nepal and Bhutan in the recent past and to date over 200 potentially dangerous glacial lakes have been documented across the Himalayan region (Bajracharya et.al., 2006). A GLOF event of 1985 originating from Dig Tsho, a glacial lake in the Khumbu Himal, Nepal, destroyed the Namche Small Hydel Project and caused extensive damage downstream. GLOFs have caused damage across national borders; outbursts originating in China have impacted areas in Nepal, India, and Bhutan (Ives et.al., 2010). June 2013 floods in Uttarakhand also have big GLOF component. The Nathpa Jhakri Hydroelectric Project situated in Himachal Pradesh has dealt successfully since its commissioning in 2000 the frequent flash floods of large magnitudes due to large sluice spillway openings creating riverine flows and accurate warning system so that sufficient time is available for proper assessment of flood and depleting the Nathpa reservoir in anticipation of heavy inflows and timely operation of spillway gates. The GLOF of the order of 4500 m³/s was observed on 26th June, 2005 due to breach of artificial lake formed on Parechuriver (in Tibet region). Since necessary measures had already been taken, no major damages occurred for the project. During the floods river carried lot of silt, boulders, gravel, & trash etc. and the intake gates of water conductor system of powerhouse was closed to avert damages to the Power House in Jhakri. Urgent action by the international community to develop even better scientific understanding of the consequences of global climate change on GLOF and to take the corrective and precautionary measures is required. Monitoring and tracking of the lakes in West and North Sikkim has revealed that quite a few of them are expanding due to accelerated glacial retreat and melting due to climate change impacts. In addition, new lakes have also developed due to glacier retreat and melting. During the retreat the glaciers leave behind moraines (accumulation of boulders, stones or other debris) in the valley. Hydraulic modeling of spillway is very important in case for Himalayan project to predict the discharging capacity of spillway for PMF + GLOF condition and fixing the important levels like crest of spillway, FRL, MDDL, invert of power intake and top of dam.

4. REVISION OF DESIGN FLOODS FOR EXISTING SPILLWAYS

Previous design flood selection criteria considered factors such as dam height, storage volume and downstream development and related design floods to downstream hazard classifications. Current practice is to classify dams based on the consequences of dam failure. This requires the identification of potential failure modes and a quantitative evaluation of consequences of dam failure. The spillway design flood is based on these considerations. All existing dams whose failure would result in loss of life, significant economic or environmental damage or other unacceptable consequences for any condition will require corrective actions. Quantitative risk assessment includes the probability of adverse loading, the type of response, the probability of an adverse response and the consequences in terms of expected losses. It is seen that when such an analysis is applied to existing structures, in most of the cases, the spillway comes out to be of inadequate capacity. It is estimated that in India at least 50% of the existing spillways are inadequate in respect of safety of the dams. Another consideration is that a dam constructed in olden days were in a remote area whereas in these days, the projects are very close to urban development and the potential damage due to the failure of such a dam is now many folds severe than anticipated at the time of design or construction. The existing spillways are therefore required to be remodeled to handle larger floods. Increased spillway capacity to handle larger floods can be achieved by increasing spillway crest length, addition of spillway bays, increase in operating head or improving the discharge co-efficient. However, these measures are often governed by the topography and geology at the dam site. A modest increase in the discharge coefficient can generally be realized by refinement of the spillway crest shape and by channel improvement but at a greater cost. A more common modification to the existing dam to accommodate larger floods is an enlargement of the existing spillway or construction of a new spillway. All these conventional methods have many limitations, and call for design innovations.

Verifying and revising the dam design flood estimates- incorporating additional available data and modern methods of flood estimation-is the key technical priority in the national dam safety programme; and, this activity is also the prime requirement under ongoing Dam Rehabilitation and Improvement Programme (DRIP). Review of design flood estimates have been completed for 217 dams. Review indicates that there is an upward revision of 50% for 58% dams and an upward revision of 100% in 36% of dams. For few dams, the revised flood values have exceeded their adopted design value by substantial orders. To name a few, Kharadi dam of Madhya Pradesh exceeded by 929%, Sher tank (M.P.) exceeded by 503%, Manimukhanadhi dam in Tamilnadu exceeded by 384% (Pillai et.al., 2013). Once the reviewed design flood is found to be significantly higher than the original flood, adequacy of spillway capacity needs to be thoroughly reviewed. If this structural method is found to be inadequate, non-structural methods are required to be adopted. The solution adopted may vary from case to case. The following are the few alternatives which can be adopted to mitigate the increased design flood:

- Augmenting the existing spillway capacity
- Provision of breaching section or fuse plugs
- Increasing the freeboard above FRL by provision of Parapet wall etc.
- Implementation of early warning system
- Lowering the water levels in the reservoir before monsoon such that flood moderation can be enhanced

For increase in the existing spillway capacity, structural options like provision of additional spillway, where site is available, or increase in spillway crest length by provision of labyrinth spillway or duckbill spillway, breaching section in the form of fuse-gates etc can be thought of. The increased crestlength provided by the walls allows the passage of greater discharges for a given width and operating head. Labyrinth spillways are particularly suited to sites wherethe spillway width and upstream water surface are limited and larger discharges arerequired. This may also provide additional storage capacity in lieu of more costlygated structure. Use of breach sections in the form of fuse gates etc can also provided in saddle on the reservoir rim from where flood discharge can be safely passed. An efficient fuse plug design correlates rate of increase in reservoir outflow during wash out in consonance with the outflow from the spillway gates or outlet works, the total outflow being the one required for the safety of the dam. The rate at which the fuse-plug washes out is of primary importance and depends upon the fuse-plug geometry, the depth of flow and the gradation and compaction of embankment material.

In the case of dams having gated spillways, provision of devices like labyrinth spillway etc may not be suitable. Although special arrangement for providing necessary water way for such devices could be made through abutments or saddles in the reservoir, these may prove to be costly. For the gravity dams, especially concrete dams, allowing overtopping for floods of rare occurrence may prove to be more economical and effective provided necessary safety measures are taken care of. In case of narrow valleys options like tunnel spillways can augment the existing spillway capacity.

Under DRIP programme, the design flood for Hirakud dam spillway, Odisha has been revised to 69,632 m³/s from original design discharge 42,450 m³/s i.e., upward revision by 27,182 m³/s. To pass this increased flood, two additional spillways, one on right side and another on left is proposed to be constructed in the phased manner. CWPRS has been entrusted hydraulic model studies for optimizing the design of the additional spillway and energy dissipator on left dyke during phase-I. Two models, 1:40 scale 2-D sectional model and 1:100 scale 3-D comprehensive model have been constructed to assess the discharging capacity of spillway, overall performance of energy dissipator and spill channel and flow conditions in the river for various scenarios during combined operation of existing spillway on main Dam. Hydraulic model studies are very important tool to understand the complex hydraulics of flow over spillway and appurtenant structures and safety of mega projects like Hirakud Dam.

5. COASTAL RESERVOIRS AND DESIGN CONSIDERATION OF SPILLWAYS

Coastal reservoirs have the potential to become a major source of freshwater in coastal areas. By definition, a coastal reservoir is a freshwater storage located in coastal waters (river mouth, lagoon, gulf or protected bay) being fed by a sustainable freshwater flow. Coastal reservoirs have an impermeable barrier isolating the freshwater storage from intrusion by the surrounding brakish seawater. Depending on its location, water captured in a coastal reservoir will be of varying quality for domestic, agricultural or industrial water use. India has got about 7515 km of coast line and about 78% of surface runoff is directly delivering in to the sea. For the benefit of the people living along the coast line, coastal reservoirs can be better solution. Now, the world is using only 1/6th of total surface runoff and other 5/6th part is directly discharging in to sea (Yang, 2015). This highlights the fact that there is enough water available but deficiency is in storage.Hence, the solution lies in utilizing (or) conserving the abundant monsoon water which runs off into the sea. In the next 100 years, population and water demands may continue to increase significantly and the majority of the existing inland reservoirs will be deficient to fulfill the demand of increased population due to their structural life span and sedimentation. Hence, in the future there will be more demand for coastal reservoirs. Coastal Reservoirs are already being used in China, South Korea, Hong Kong and Singapore (Table 2) and have been largely successful, especially in places where there are no more opportunities to build inland reservoirs.

Table 2 : Existing coastal reservoirs in the World (Yang, 2013)

Name	Catchment (km ²)	Dam length (m)	Capacity (10 ⁶ m ³)	Year com-pleted	Country/river
Qing Chaosha/Shanghai	1.8million	43,000	553	2011	China/Yangtze
Saemanguem	332	33000	530	2011	South Korea
Sihwa	---	12400	323	1994	South Korea
Marina Barrage	113	350	---	2008	Singapore
Chen Hang/Shanghai	1.8million	4700	8.3	1992	China/Yangtze
Yu Huan	166	1080	64.1	1998	China/ Zhejiang
Baogang/Shanghai	1.8million		12	1985	China/Yangtze
Plover Cove	45.9	2000	230	1968	Hong Kong

5.1 Coastal reservoirs in India

Thanneermukkom bund: Thanneermukkom bund was constructed as part of the Kuttanad lowland development scheme and creation of a freshwater reservoir in the coastal area of Kerala, India (Figure 6). It divides Vembanad Lake into a freshwater lake fed by the rivers draining into the lake and a brackish water lake fed by ocean currents into the lowlands of Kuttanad. The four major rivers of Kerala, the Pamba, Meenachil, Achankovil, and Manimala, flow into the region before their confluence into the Arabian Sea. The regions receive a good amount of annual rainfall, which is above 3,000 mm, and these four rivers bring a large quantity of water into the lake before joining the sea. By constructing the saltwater barrier, a coastal reservoir having freshwater has been created for increasing agricultural activities in the area in addition to land development. The Thanneermukkom Bund has a total span of 1,410 metres and have a total of 90 shutters including 31 shutters each in the western and eastern sides and 28 shutters have replaced the old earthen bund.



Figure 6 : View of Thanneermukkom barrage

Kalpasar Project: Proposed gigantic Kalpasar project, also known as Gulf of Khambhat development project is mainly a water resources project involving the creation of a freshwater reservoir in the Gulf of Khambhat for meeting the demands of irrigation, domestic and industrial water supply (Figure 7). Associated components related to the freshwater reservoir are the use of the top of the dam across the Gulf as a surface transport link, potential development of fisheries, and reclamation of saline land around the freshwater reservoir. The Kalpasar Project envisages building a 30 km long dam across the Gulf of Khambhat for establishing a huge freshwater reservoir for irrigation, drinking, and industrial purposes. Once constructed it will be one of the largest freshwater reservoirs in the sea with the highest priority for irrigation and drinking water in the region for Saurashtra and the Central Gujarat regions of India. (<https://kalpasar.gujarat.gov.in/>)

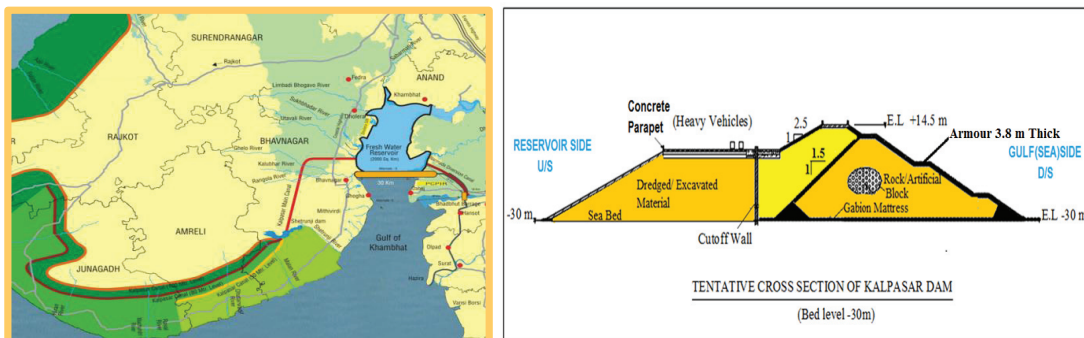


Figure 7 : Tentative layout and cross section of Kalpasar dam (<https://kalpasar.gujarat.gov.in/>)

5.2 Design considerations for spillway and energy dissipation arrangement

Constructing a dam in the sea is very challenging task as it involves understanding of various aspects of natural phenomenon like tides and waves, challenging foundation issues, complex hydraulics and ecology. Special design considerations are to be employed for spillway and energy dissipation arrangement as their operational performance is influenced by the cyclic tidal variations and storm surges. Stringent reservoir regulations are necessary to avoid mixing of fresh water and saline water. For design of spillway, it is necessary to evolve following parameters:

- Estimation of design flood
- Sizing of spillway capacity such that to avoid the flooding of the reclaimed areas without the water level in the reservoir exceeding certain maximum level
- Tidal variation, storm surge and wave data
- Dam safety aspect with tidal effects on the dam and proposed spillway
- Reservoir operation simulations according to inflow, reservoir water levels and tidal variations
- Prevention of saline water in to fresh water lake
- Energy dissipation arrangement to avoid entry of high velocity jets in the sea through spillway spans

From Figure 8, it can be seen that it is possible to operate the spillway only during low tide when the sea water level is below or equal to the reservoir water level. This point is required to be kept in mind while designing the reservoir capacity considering design outflow limitation against the inflow flood. It is necessary to find out the discharging capacity of spillway for free flowing condition and partial downstream submergence condition. Hydraulic model studies play important role to optimize the spillway design and location and determine various aspect of the operation of coastal spillway as no readily available guidelines exists.

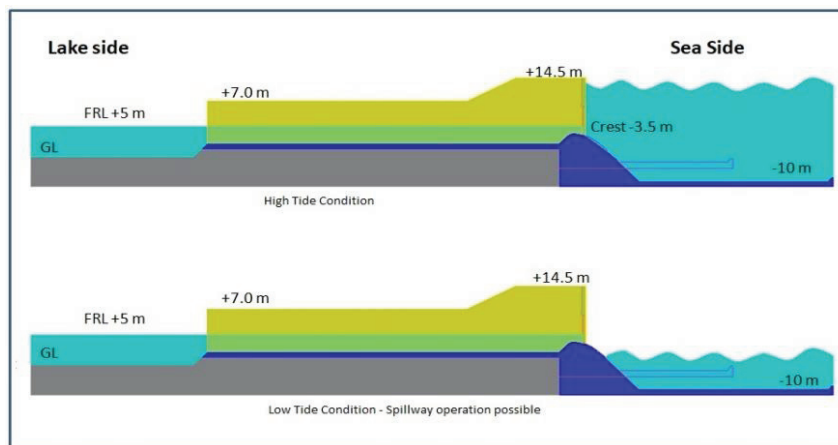


Figure 8 : The schematic view of the coastal reservoir spillway

6. CONCLUSIONS

Spillways and energy dissipators are of paramount importance and most integral part of dams. As the dam building activity is going on for years together, almost all easy sites have already been tapped. In this paper, an attempt has been made to identify the situations where there are challenges in front of the designer for future projects.

Hydropower demand will be more in recent future and the sites to tap the hydropower in India mainly lies in Himalaya. Designing the spillways considering flash floods, GLOF and Himalayan fragile geology leading to high silt load are some of the challenges for the designers. Spillway will play major role in designing sustainable projects in this region.

Under DRIP, many old dams in India are assessed for design flood and there is upward revision in the design flood for many of the dams. To minimize the risk of overtopping of dam, designers have to think of enhancing the existing spillway capacity and/or alternative methods to pass the revised flood.

To conserve the excess runoff flowing into the sea, and to avoid submergence of landmass and rehabilitation issues in inland dam building, coastal reservoirs will be attractive option in future. As India got about 7500 km coast-line, there is future for building big coastal reservoirs for various purposes.

As no guidelines are available for designing spillways and energy dissipators under such situations, hydraulic model studies play very important role in optimizing the design and layout of the spillways and associated appurtenant structures.

REFERENCES

- Bhopal Singh, 2013. Hydrologic safety of dams in India, INCOLD, volume 2, No. 1.
- Bajracharya S. R., Mool P. K., Shreshtha B.R. 2006. The impact of global warming on the glaciers of the Himalaya, Proceedings international symposium on geo-disasters, infrastructure management and protection of world heritage sites, Nepal
- Deolalikar, P. B., Bhosekar, V. V. (Mrs.) and Pethe, P. C. 2008. Research in to factors influencing the design of breastwall /sluice spillways. CWPRS Technical Memorandum <https://kalpasar.gujarat.gov.in/>
- Ives, J D, Shrestha R B, Mool P. K. 2010. Formation of glacial lakes in the Hindu Kush-Himalayas and GLOF risk assessment. Kathmandu: ICIMOD (international centre for integrated mountain development).
- Khatsuria R. M. 2004. Hydraulics of Spillways and Energy Dissipators. New York; Marcel Dekker Publication
- Pandya A.B., Goel N.K., Pillai B.R.K. 2014. Management of design flood issues in existing dams under climate change, Dams in global environmental challenges; Proc. intern.symp.,Bali, Indonesia,
- Pillai B.R.K., Manoj Kumar, Nathan L.A.V. 2013. Design flood reviews of existing dams and related risk management issues under Dam Rehabilitation and Improvemnet Project, Dam flood issues; Proc. work-shop.,CWC, New Delhi.
- Shu-Qing Yang . 2015.Coastal reservoir-a technology that may dominate future water supply. Journal of Water Resource and Hydraulic Engineering Oct. 2015, Vol. 4 Issue. 4, pp: 388-397.